



## Bortoluzzi SliderM50+ 2 Door 1600-1800mm

**Part Number: SYE512AM501600SU**

Salice M50+ Coplanar Sliding Door System for Large Cabinets

Salice M50+ Coplanar Sliding Door System has decelerated open and close mechanisms and sit perfectly flush when fully closed.

<div><br></div>

Adjustable	----- Yes
Application	----- Large Cabinets, Pantries, Closets, Wardrobes, Furniture
Cabinet Width Range	----- 1600 to 1800 mm
Door Height (Maximum)	----- 3000 mm
Door Thickness	----- Min. 19mm (3/4").
Door Thickness Including Hand	45mm (1-3/4") Recessed Adjusters. 40mm (1-9/16") Screw-On Adjusters.
Door Type	----- MDF, Wood
Door Width Range	----- 800 to 900 mm
Finish	----- Satin Aluminum
Material	----- Aluminum
Number of Doors	----- 2
Opening Direction	----- Both Left and Right Opening
Operation	----- Coplanar
Rail Length	----- 1599 mm
Soft-Close Type	----- Decelerated Open and Close
Weight Capacity Per Door	----- 50 kg (110 lbs)

### Product Description

The Bortoluzzi Slider M50+ is a sliding door mechanism ideal for large pantry cabinets and wardrobe or closet doors. With 50kg (110lbs) of load capacity per door, it can support medium to large sized doors, while maintaining the Bortoluzzi trademark smooth and silent movement. The main bearing track and mechanism is installed on top of the cabinet with a secondary guiding track on the bottom. Coplanar movement means the open door passes in front of the closed door, while returning to a closed position flush with the opposite door. Each door is equipped with a system that decelerates both the opening and closing, so that only a small amount of force is required to begin either phase.

### Product Advantages

- Ideal for pantry, wardrobes and closets
- Smooth and silent door movement
- Decelerated open and close
- Up to 50 kg (110lbs) per door
- Lifetime warranty

### Important Information

During your design phase, please contact us for technical support on any Bortoluzzi Sliding Door System. We will ensure that you have full technical support to ensure understanding of the product. All systems will be specified by Salice to your project measurements and require sign off before ordering.

---



## Technical Documents



View this product online at <https://marathonhardware.com/pd/SYE512AM501600SU>




## Technical Documents



# SALICE




### sliding systems coplanar

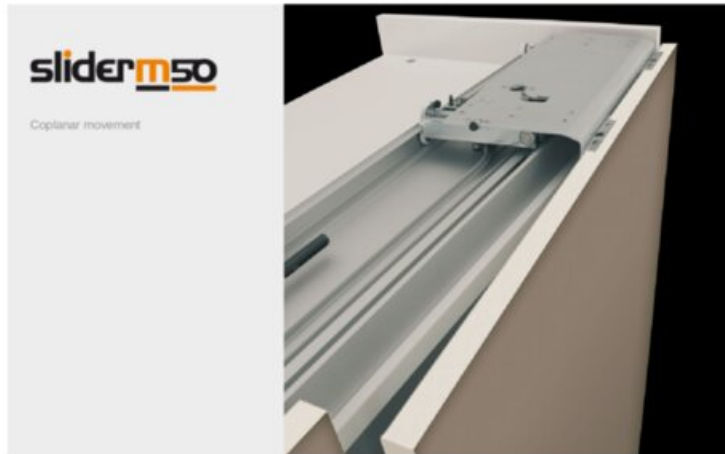

Coplanar sliding system for two-door units with a weight up to 50 kg, decelerated opening and closing.

- Coplanar two-door mechanism.
- Decelerated opening and closing.
- Maximum door load: 50kg.
- Door width: minimum 800mm, maximum 2,000mm.
- Maximum door height: 3,000mm.
- Distance of the door from the bottom edge of the base panel: 33/17mm.



#### RECESSED ADJUSTERS:

- Door thickness: min. 18mm; door+handle thickness: 45mm.

#### SURFACE-MOUNTED ADJUSTERS:

- Door thickness: min. 18mm; door+handle thickness: 40mm.
- Vertical door adjustment:  $\pm 5$ mm.
- Horizontal door adjustment:  $\pm 3.5$ mm.
- Weight-bearing upper track fitted to the top panel of the unit with side clips and screws.
- Lower track fitted under the base panel of the unit with side clips and screws.
- Can be adapted for cupboards up to 200mm wider.
- Compatible with Clipper frames.

**ARTURO SALICE S.p.A.** (società con unico socio)  
 VIA PROVINCIALE NORD-OVEST, 10  
 22060 NORDINAVEY (COMO) ITALIA  
 TEL. 031 704204  
 FAX 031 701808  
 info.salice@salice.com

**DEUTSCHE SALICE GmbH**  
 TALEG WEG 10/11/12/13/14  
 42699 Solingen, Germany  
 www.salice.de

**SALICE FRANCE S.A.R.L.**  
 06000 ANTIBES  
 www.salicefrance.com

**SALICE AMERICA Inc.**  
 CHARLOTTE NC 28227  
 www.saliceusa.com

**SALICE UK Ltd.**  
 HUNTINGDON CAMBS PE28 6PN  
 www.saliceuk.co.uk

**SALICE CANADA Inc.**  
 MONTREAL, QUEBEC L3L 8Y1  
 www.salicecanada.com

**SALICE ESPAÑA, S.L.**  
 CRUZ DE VIALEROS  
 www.saliceespana.es

View this product online at <https://marathonhardware.com/pd/SYE512AM501600SU>



## Technical Documents



View this product online at <https://marathonhardware.com/pd/SYE512AM501600SU>

